


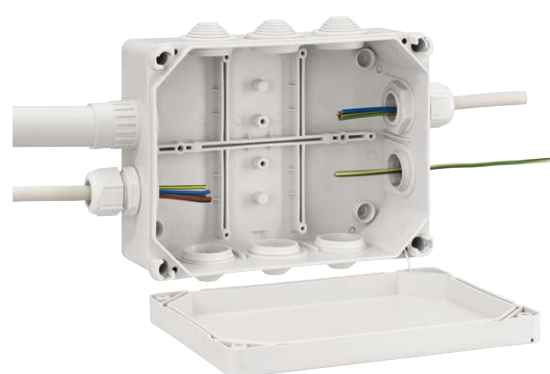

- 6 sizes
- Mounting on wood or other combustible materials
- Mounted stepped nipples
- Cross-sectional area of 1.5 mm² to 10 mm²
- Insertion points are equally suitable for metric mounting accessories

Suitable for installation

- in damp and wet areas and rooms
- in installations for gatherings of people
- in temporary buildings, cars and caravans

IP55

10²

IK07



400V
AC




Junction boxes HP

www.spelsberg.com

HP 70

75 x 75 x 42 mm

Internal dimension: 68 x 68 x 38 mm



Description

Order no.

Junction box acc. to DIN EN 60670 (VDE 0606), 3 recessed stepped nipples, and two loose ones enclosed, seal range 5 - 16 mm, for terminals up to 2.5 mm²

IP55

2,5²

IK07

400V
AC**HP 70-L**


Grey, without terminals

320 970 01

HP 80

85 x 85 x 42 mm

Internal dimension: 78 x 78 x 38 mm



Junction box acc. to DIN EN 60670 (VDE 0606), 7 recessed stepped nipples, seal range 5 - 16 mm, for terminals up to 2.5 mm²

IP55

2,5²

IK07

400V
AC**HP 80-L**


Grey, without terminals

322 980 01

HP 90

90 x 90 x 45 mm

Internal dimension: 82 x 82 x 38 mm



Description

Order no.

Junction box acc. to DIN EN 60670 (VDE 0606), 7 recessed stepped nipples, seal range 5 - 16 mm, for terminals up to 4 mm²

IP55

4²

IK07



400V
AC



HP 90-L


Grey, without terminals

325 990 01

HP 100

113 x 113 x 58 mm

Internal dimension: 103,5 x 103,5 x 32 mm



Junction box acc. to DIN EN 60670 (VDE 0606), U_i=690V, 7 recessed stepped nipples, seal range 5 - 21 mm, for terminals up to 10 mm²

IP55

10²

IK07



690V
AC




HP 100-L

Grey, without terminals

326 900 01

HP 150
164 x 119 x 77 mm
Internal dimension: 155 x 110 x 70 mm



Description	Order no.
Junction box, $U_i=690V$, 10 recessed stepped nipples, seal range 5 - 21 mm	


IP55

IK07

690V AC

HP 150-L Grey, without terminals, with cover retainer	326 950 01
---	------------

HP 190
199 x 149 x 77 mm
Internal dimension: 190 x 140 x 70 mm



Junction box, $U_i=690V$, 10 recessed stepped nipples, seal range 13 - 26.5 mm

IP55

IK07

690V AC

HP 190-L Grey, without terminals, with cover retainer	326 990 01
---	------------